
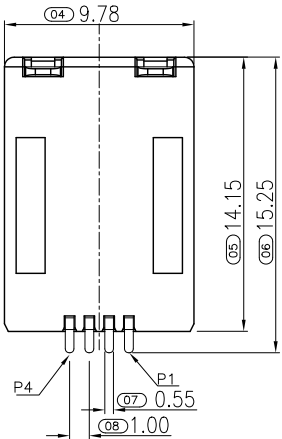

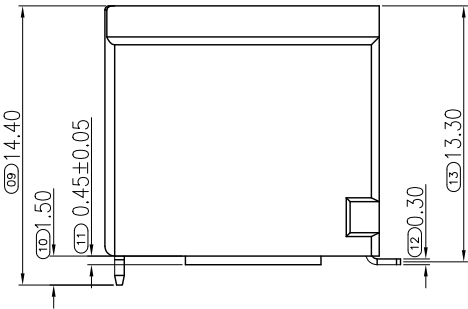
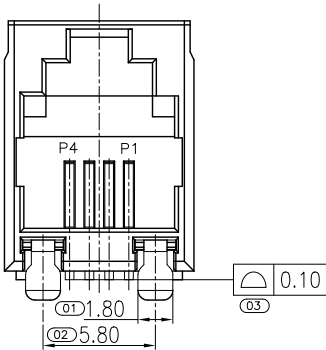


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		FIRST ISSUE	
B	GE1801006	ADD OTHER VIEWS	2018.01.12

LEG



GENERAL TOLERANCE			DRAWN	Harold.zou	2018.01.12	SCALE	PART NO.	1J1C023*01419-00	
X.±0.30	x.*±1°		CHECKED	Ray.lee	2018.01.12	N/A	TITLE	CONNECTOR 1X1 PORT RJ09 4P4C W/O LEDS&SHIELDING	
.X±0.25	.x*±0.1°		APPROVED	Sky.he	2018.01.12	UNITS	mm	成品SPEC图	
.XX±0.20			File NO.	J1C02301S					
.XXX±0.10			REV.	蘇州祥龍嘉業電子有限公司					
SHEET	1/2	Q'TY	1	B	Goldenconn Electronic Technology Co.,LTD				

此图面为双方检验的唯一标准

REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		FIRST ISSUE	
B	GE1801006	ADD OTHER VIEWS	2018.01.12

NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING: 150VAC
- 2.CURRENT RATING: 1.5AMPS
- 3.CONTACT RESISTANCE: 20 mΩ MAX
- 4.INSULATION RESISTANCE: 1000 MΩ MIN @ 500V DC
- 5.WITHSTANDING VOLTAGE: 500 V AC OR DC

MECHANICAL:

- 1.HOUSING MATERIAL: LCP UL94V-0,BLACK.
- 2.CONTACT MATERIAL:C5191.
- 3.LEG MATERIAL:C2680,NICKEL PLATED.
- 4.CONTACT PLATING: 1).SELECTIVE GOLD PLATED(SEE PART No.) ON CONTACT AREA,100U" MIN. TIN PLATED ON TAIL; OVER 30U" MIN. NICKEL.
- 5.MATING / UNMATING FORCE: 30N MAX.
- 6.RETENTION STRENGTH: 50N FOR 60S±5S.
- 7.DURABILITY : 750 CYCLES MIN.


ENVIRONMENTAL:

- 1.STORAGE TEMPERATURE: -40°C ~ + 85°C RELATIVE HUMIDITY<80%
- 2.OPERATION TEMPERATURE : -40°~+ 85°C

PART NO:

1J1C023*01419-00

GOLD PLATING
F=G/F H=3U" E=5U" W=6U"
J=15U" K=30U" M=50U"

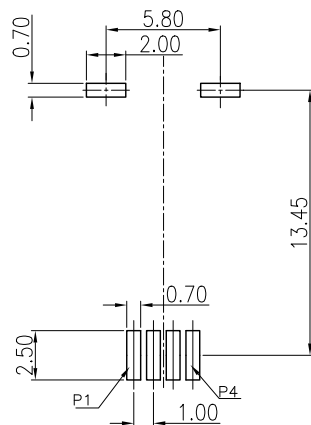


RECOMMENDED PCB LAYOUT

TOLERANCE ±0.05MM



GENERAL TOLERANCE				DRAWN	Harold.zou	2018.01.12	SCALE	PART NO.	1J1C023*01419-00		
X.±0.30		x.*±1°		CHECKED	Ray.lee	2018.01.12	N/A	TITLE	CONNECTOR 1X1 PORT RJ09 4P4C W/O LEDS&SHIELDING		
.X±0.25		.x*±0.1°		APPROVED	Sky.he	2018.01.12	UNITS	mm	成品SPEC图		
.XX±0.20				File NO.	J1C02301S						
.XXX±0.10				REV.	蘇州祥龍嘉業電子有限公司						
SHEET	2/2	Q'TY	1	B	Goldenconn Electronic Technology Co.,LTD						

REV.	ECN.NO.	MODIFY.CONTENT	DATE
A	--	FIRST VERSION	

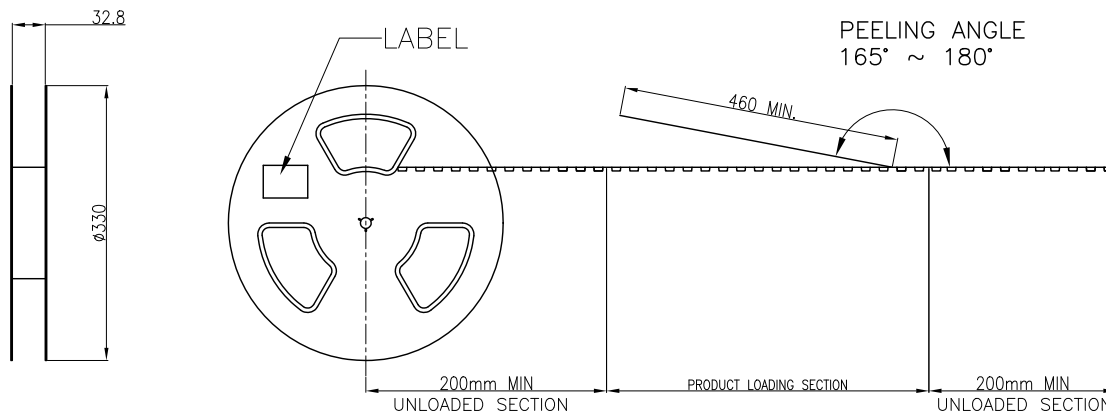


NOTES :

1. MATERIAL :
COVER TAPE : P.S T=0.05mm
CARRIER TAPE : P.S T=0.40mm
CARTON: CORRUGATED FIBER
2. DIMENSION :
REEL : SEE DRAWING
SHIPPING BOX: 350X350X300mm
3. QUANTITY : SEE TABLE
4. PEELING RESISTANCE : 10gf~130gf (for 12~56mm)
5. PEELING SPEED : 300mm/MINUTES

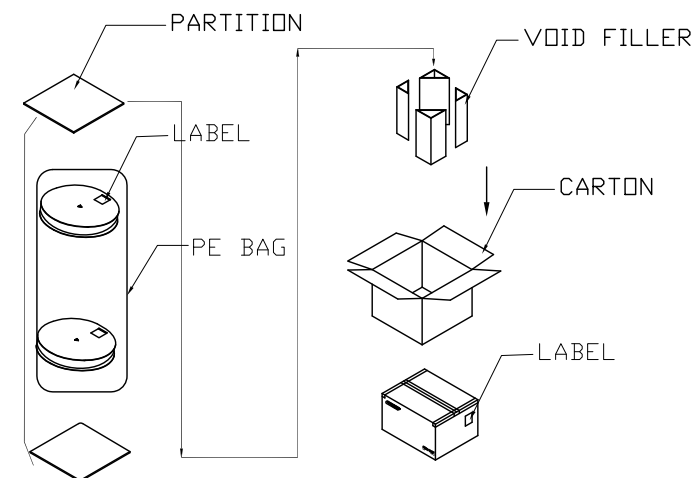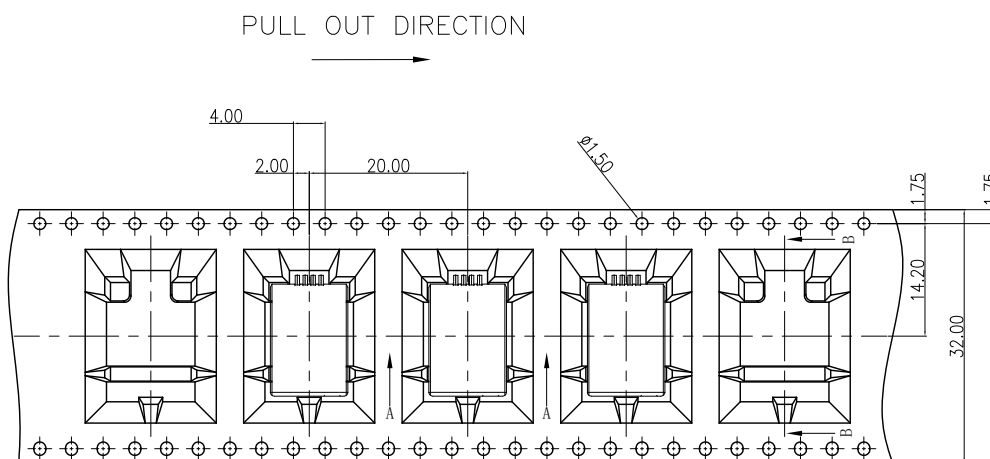

200	7	1400
PCS/REEL	REEL/BOX	TOTAL Q'TY

GENERAL TOLERANCE		DRAWN			SCALE	PART NO.	1J1C023H01419-00	
X.±0.40	x.°±1°	CHECKED			N/A	TITLE	RJ09 4P4C SMT W/H FOOT	
.X±0.30	.x°±0.1°	APPROVED			UNITS	mm	成品SPEC图	
.XX±0.25		File NO.	J1C02301S					
.XXX±0.10		REV.	蘇州祥龍嘉業電子有限公司 Goldenconn Electronic Technology Co.,LTD					
SHEET	1/1	Q'TY						1

注：此文件为双方检验的唯一标准